

SIGN	DATE	DESCRIPTION	APPROVER
△	01.11'06	Standard spec is changed.	xionghaitao
△	10/9'06	VDE wire range changed from 0.75-1.5mm <sup>2</sup> to 0.75-4.0mm <sup>2</sup>	Steady
△	10/9'06	Solid wire and Stranded wire changed from 12-18 to 12-20	Steady

*THIS IS CAD DRAWING, DO NOT REVISE MANUALLY Y!!!*

**Material**

- Terminal body
- (metal housing): Brass Stamped
- Terminal screw: Steel Zinc plating "+/-" slot type
- Wire guard: Stainless steel
- Surface of solder tail: Tin plated
- Insulator (housing): Thermoplastic (UL94V-0)





△ **Electrical** cULus/VDE

- Voltage rating: 300VAC/450VAC
- Current rating: 10A/17.5A
- Wire range: 0.75-4.0mm<sup>2</sup>
- Solid wire(AWG): 12-20
- Stranded wire(AWG): 12-20
- Torque: 3.5Lb-In/0.4Nm
- Screw: M3
- Wire strip length: 6-7mm
- Withstanding Voltage: 1.6KV/2.5KV
- Operating temperature: -40°C to +115°C
- Soldering temperature: 250°C±10°C/5 Sec
- SAFETY APPROVAL DETA:



**T4 xx 04 x x xxxx G**

02	2 CONTACTS	0	Black	0	4.4mm	0000 @ logo	RoHS
03	3 CONTACTS	5	Green	1	3.0mm	0091 ANY logo	Pb<40,000ppm
...	...	6	Blue			Any special item by customer request,	
24	24 CONTACTS	8	Grey			please contact sales department.	

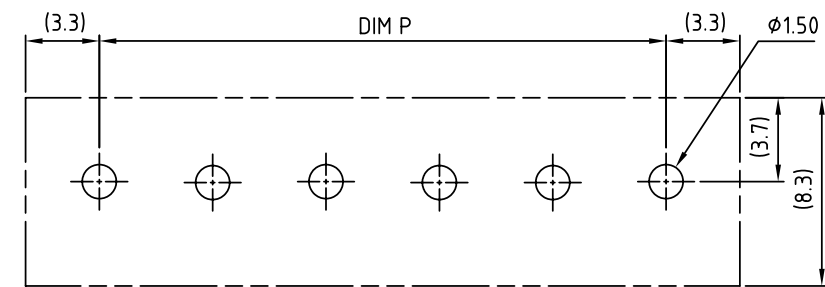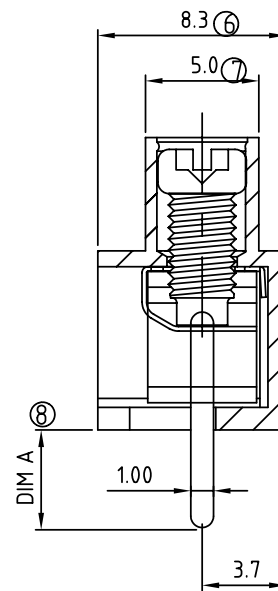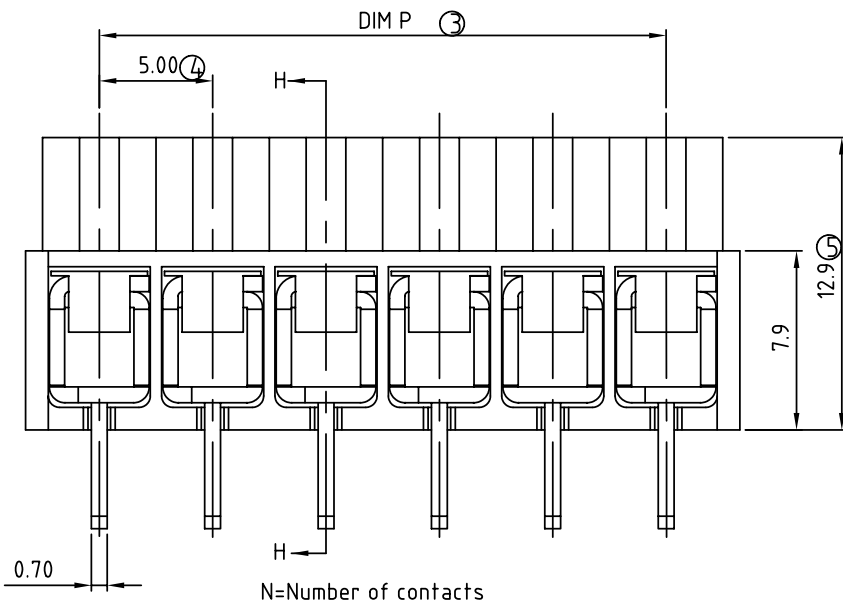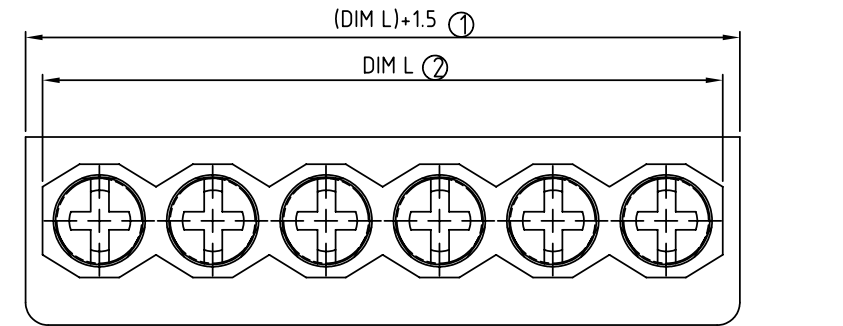

N = Number of poles  
 Dim L = N x 5.0  
 Dim P = (N-1) x 5.0

	Dim L	Dim P
2-6p	±0.20	±0.15
7-12p	±0.25	±0.20
13-18p	±0.30	±0.25
19-24p	±0.40	±0.30

RECOMMENDED P.C.B. LAYOUT

**ANYTEK**

**CUSTOMER COPY**

ALL RIGHTS RESERVED. REPRODUCTION OR ISSUE TO THIRD PARTIES IN ANY FORM WHATSOEVER IS NOT PERMITTED WITHOUT WRITTEN AUTHORITY FROM THE PROPRIETOR. PROPERTY OF ANYTEK TECHNOLOGY CO., LTD

TITLE		T4-5.0mm 2P-30P			
PART NO.		T4xx04xxxxxxG		DWG NO.	8T40001
APPROVED	CHECKED	DESIGNED	DRAWN	CUST NO.	
		Steady 2006.10.09	Steady 2006.10.09		
					Tolerance
					UNIT: mm
				SCALE: NONE	X.X ±0.50
				SHEET: 01/01	X.XX ±0.30
				REV.: D	X° ±0.10
					X° ±1°