

SIGN	DATE	DESCRIPTION	APPROVER
△	01/26'07	The Soldering temperature from 245° to 250°	Aaron
△	01/26'07	Add "VDE" stipulation	Aaron
△	12/25'08	Add "TUV" stipulation	Tony
△	5/06'10	Electrical changed	Runner
△	6/03'10	Structure changed	Cheng Bo
△	12/25'10	How to order is changed	Runner


THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!

Material:



- Item ① Insulator(lever): Thermoplastic (UL94V-0)
- Item ② Insulator(housing): Thermoplastic (UL94V-0)
- Item ③ Side contact pin: PhBz.Tin plated.
- Item ④ Center contact pin: PhBz.Tin plated.
- Item ⑤ Side Cover : Thermoplastic (UL94V-0)
- Item ⑥ Insulator(Board): Thermoplastic (UL94V-0)

- △△△ Electrical: cULus VDE
- Voltage rating: 300V 250V
 - Current rating: 6A 6A
 - Wire range: 0.5-0.75 mm²
 - Solid wire(AWG): 16-22
 - Stranded wire(AWG): 16-22
 - Wire strip length: 8.5-10.0mm
 - Withstanding Voltage: 1.6KV 2 KV
 - Operating temperature: -40°C to +115°C
 - Soldering temperature: 250°C ±10°C/5 Sec
 - Safety Approval:



PART NO.

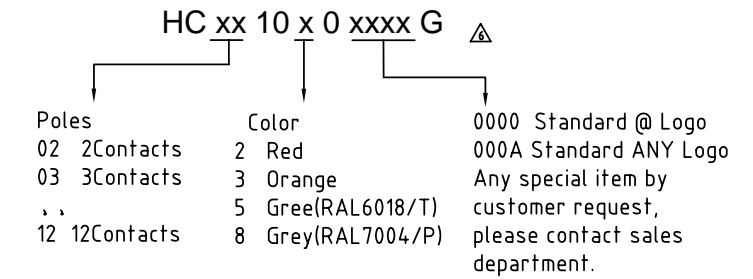

<h1>ANYTEK</h1>				<h2>CUSTOMER COPY</h2>			
ALL RIGHTS RESERVED. REPRODUCTION OR ISSUE TO THIRD PARTIES IN ANY FORM WHATSOEVER IS NOT PERMITTED WITHOUT WRITTEN AUTHORITY FROM THE PROPRIETOR. PROPERTY OF ANYTEK TECHNOLOGY CO., LTD							
TITLE		HC - 7.0mm Series					
PART NO.		HCxx10x0xxxxG			DWG NO.		8HC0201
APPROVED	CHECKED	DESIGNED	DRAWN	CUST NO.		Tolerance	
		Runner	Cheng Bo			UNIT: mm	
		2010.12.25	2010.06.03			SCALE: NONE	
				SHEET: 01/01		REV.: G	
						X.X ±0.30	
						X.XX ±0.10	
						X° ±1°	

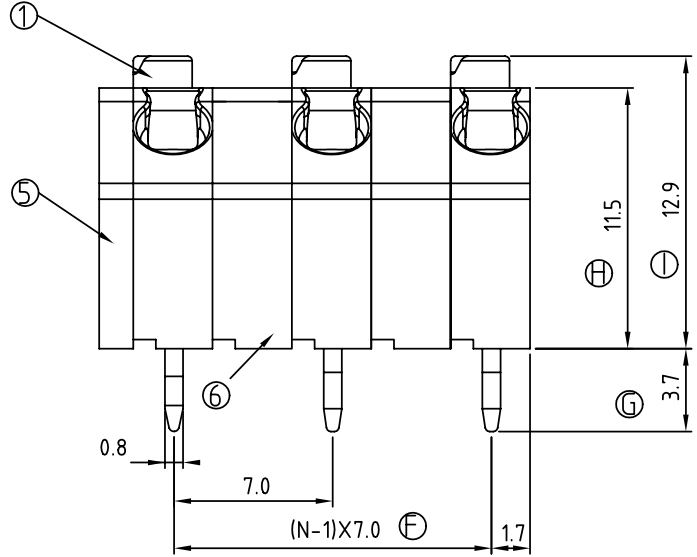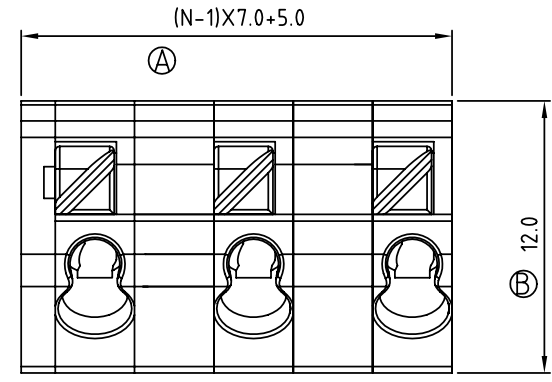

N=Number of contacts

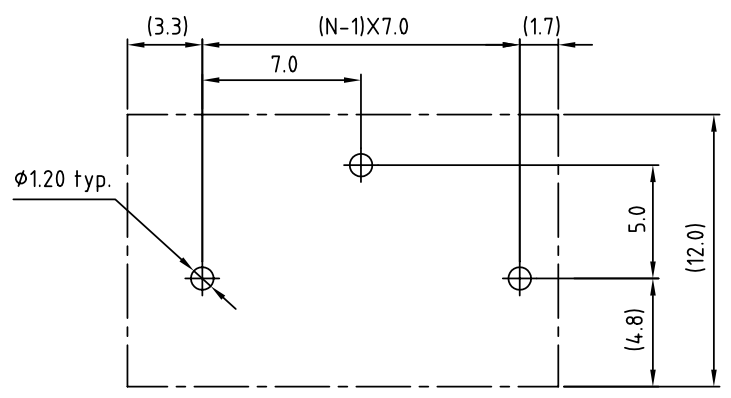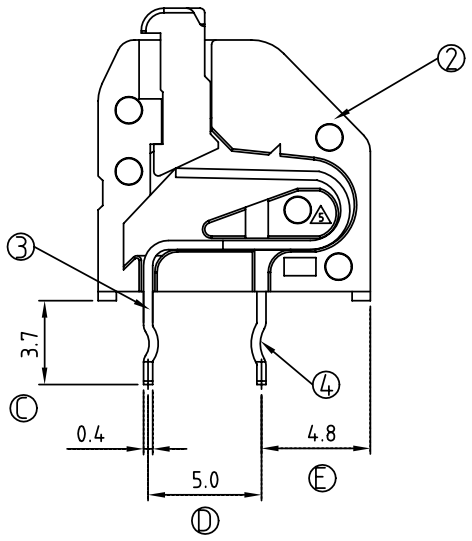

P.C.B. LAYOUT